
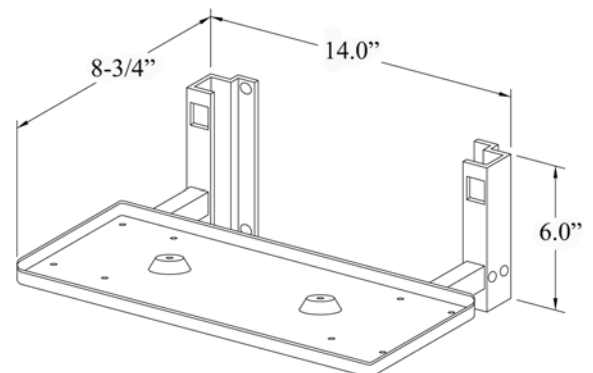


SILENT SERVANT CONVECTOR VENT-FREE SPACE HEATER

Rinnai model number:	<u>Natural Gas</u> RCE-329A-N	<u>Propane</u> RCE-329A-P
Gas Rate (Input):	Btu/hr	Btu/hr
Low:	3,000	3,400
High:	10,000	10,000
Efficiency Rating:	99.9%	99.9%
Gas Supply Pressure:	WC	WC
Min:	5.5"	6.3"
Max:	10.5"	13.0"
Description:	Efficient, vent-free convection heater	
Connections:	Electrical – AC 120V 60Hz 27 watts Gas – ½" NPT	
Combustion System:	Stainless steel Bunsen burner	
Ignition System:	Continuous spark	
Operating Buttons:	ON/OFF, Up/Down, Function-lock, Economy	
Economy Mode:	Energy savings feature	
Weight:	Approx. 17.6 lbs	
Clearance from Combustibles:	Side: 2" Top: 2" Back: 2" Front: 30"	

Dimensions:

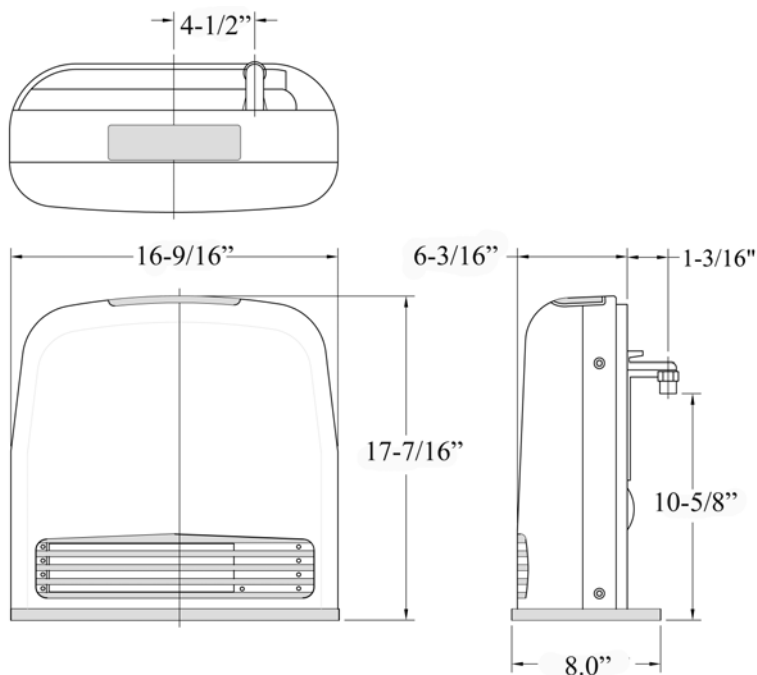

(Optional) Wall Bracket Kit

Warm Air Outlet:

Fan CFM Output:

Operation:

Temperature Control:

Temperature Range:

Safety Devices:

Bottom front louvers

Low: 53

High: 92

Finger touch control buttons

Electronic thermostat HI-LOW/OFF, Up/Down switch 2°F increments

LOW=55°F 60°F~80°F HI=High Combustion

Flame failure – flame rod

Over heat – Bi-metal switch, thermal fuse, thermistor

Power failure – PCB, gas valve will automatically close

Tilt Switch- If the heater is knocked over the gas supply will shut off.

Child Safety Lock

Oxygen depletion safety device- will cut the gas supply off when low oxygen is sensed.

Control Panel:

